



Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

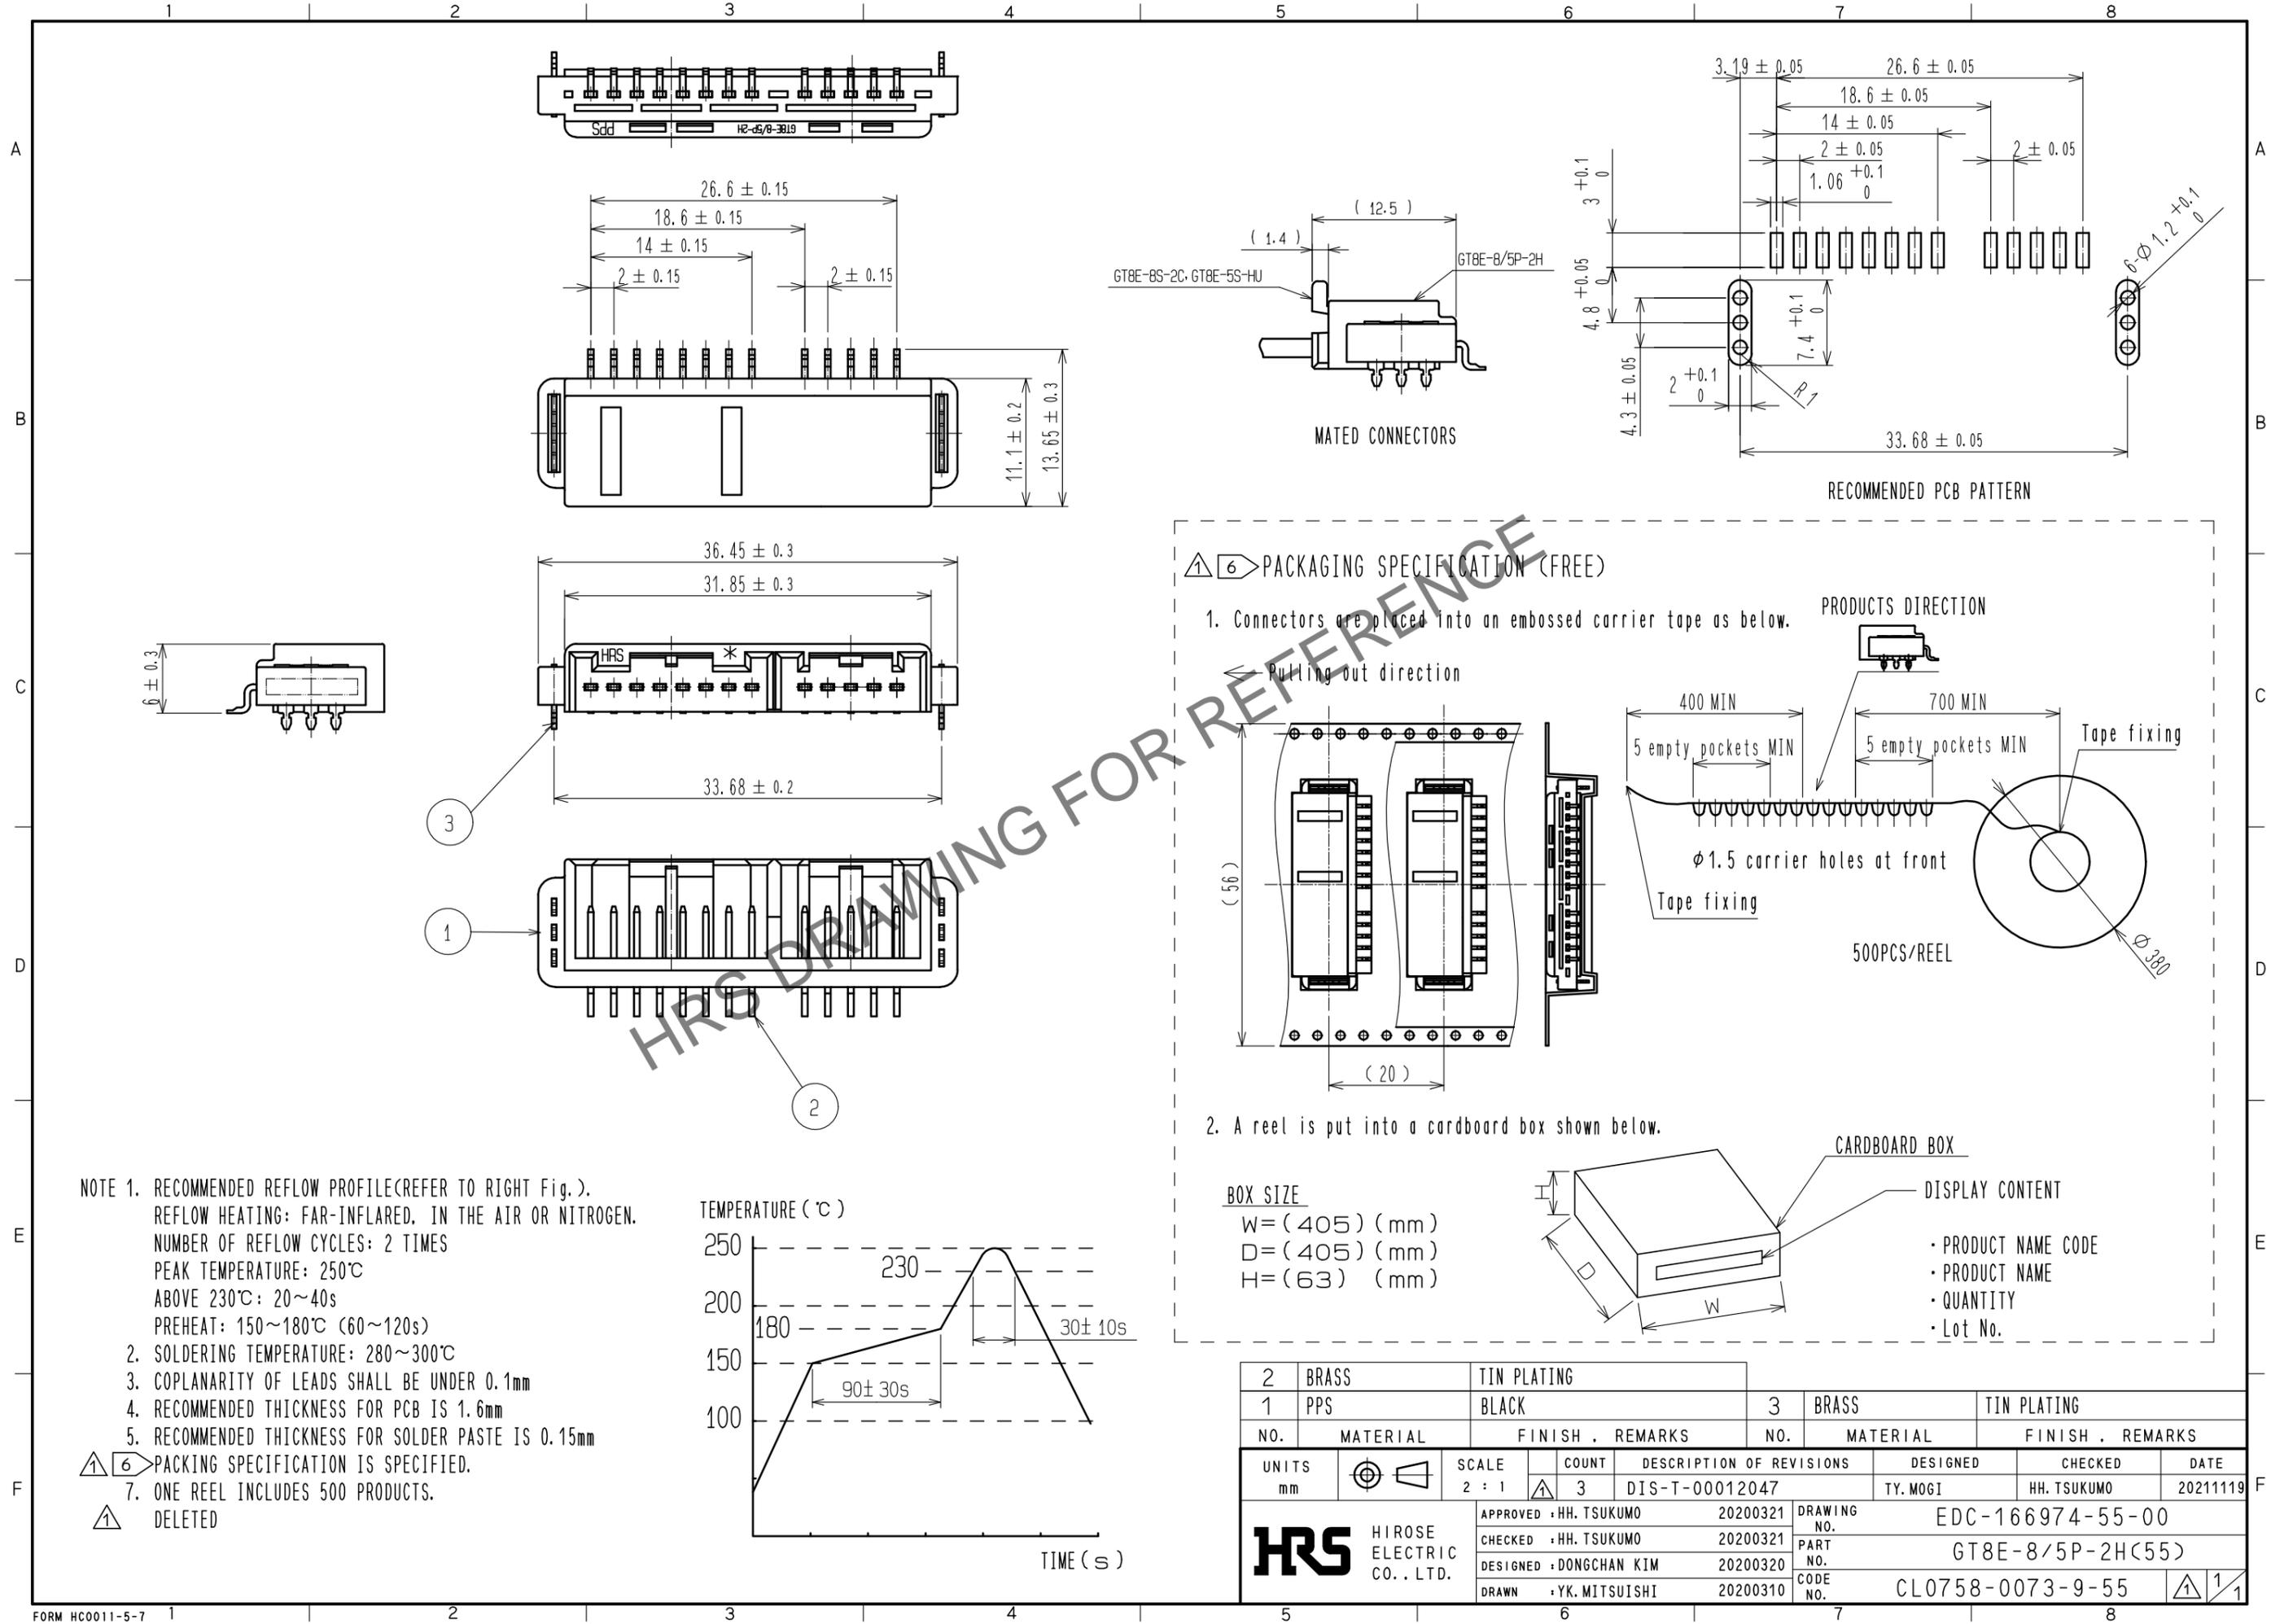

NOTE 1. RECOMMENDED REFLOW PROFILE(REFER TO RIGHT Fig.).
 REFLOW HEATING: FAR-INFLARED. IN THE AIR OR NITROGEN.
 NUMBER OF REFLOW CYCLES: 2 TIMES
 PEAK TEMPERATURE: 250°C
 ABOVE 230°C: 20~40s
 PREHEAT: 150~180°C (60~120s)

2. SOLDERING TEMPERATURE: 280~300°C
 3. COPLANARITY OF LEADS SHALL BE UNDER 0.1mm
 4. RECOMMENDED THICKNESS FOR PCB IS 1.6mm
 5. RECOMMENDED THICKNESS FOR SOLDER PASTE IS 0.15mm

① ⑥ PACKAGING SPECIFICATION IS SPECIFIED.
 7. ONE REEL INCLUDES 500 PRODUCTS.
 ① DELETED

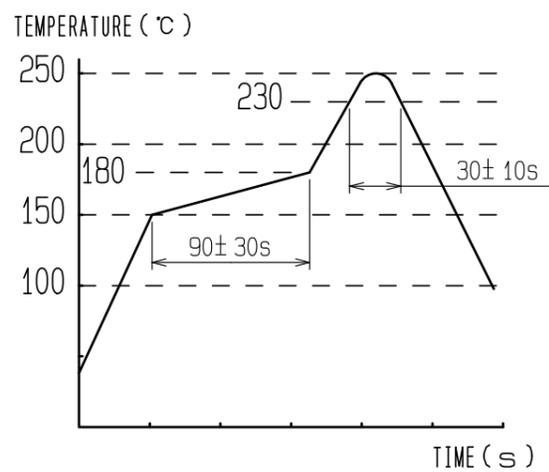

2	BRASS	TIN PLATING							
1	PPS	BLACK	3	BRASS	TIN PLATING				
NO.	MATERIAL	FINISH .	REMARKS	NO.	MATERIAL	FINISH .	REMARKS		
UNITS	mm	SCALE	2 : 1	COUNT	3	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
						DIS-T-00012047	TY. MOGI	HH. TSUKUMO	20211119
APPROVED : HH. TSUKUMO		20200321		DRAWING NO.		EDC-166974-55-00			
CHECKED : HH. TSUKUMO		20200321		PART NO.		GT8E-8/5P-2H(55)			
DESIGNED : DONGCHAN KIM		20200320		CODE NO.		CL0758-0073-9-55			
DRAWN : YK. MITSUISHI		20200310							