


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

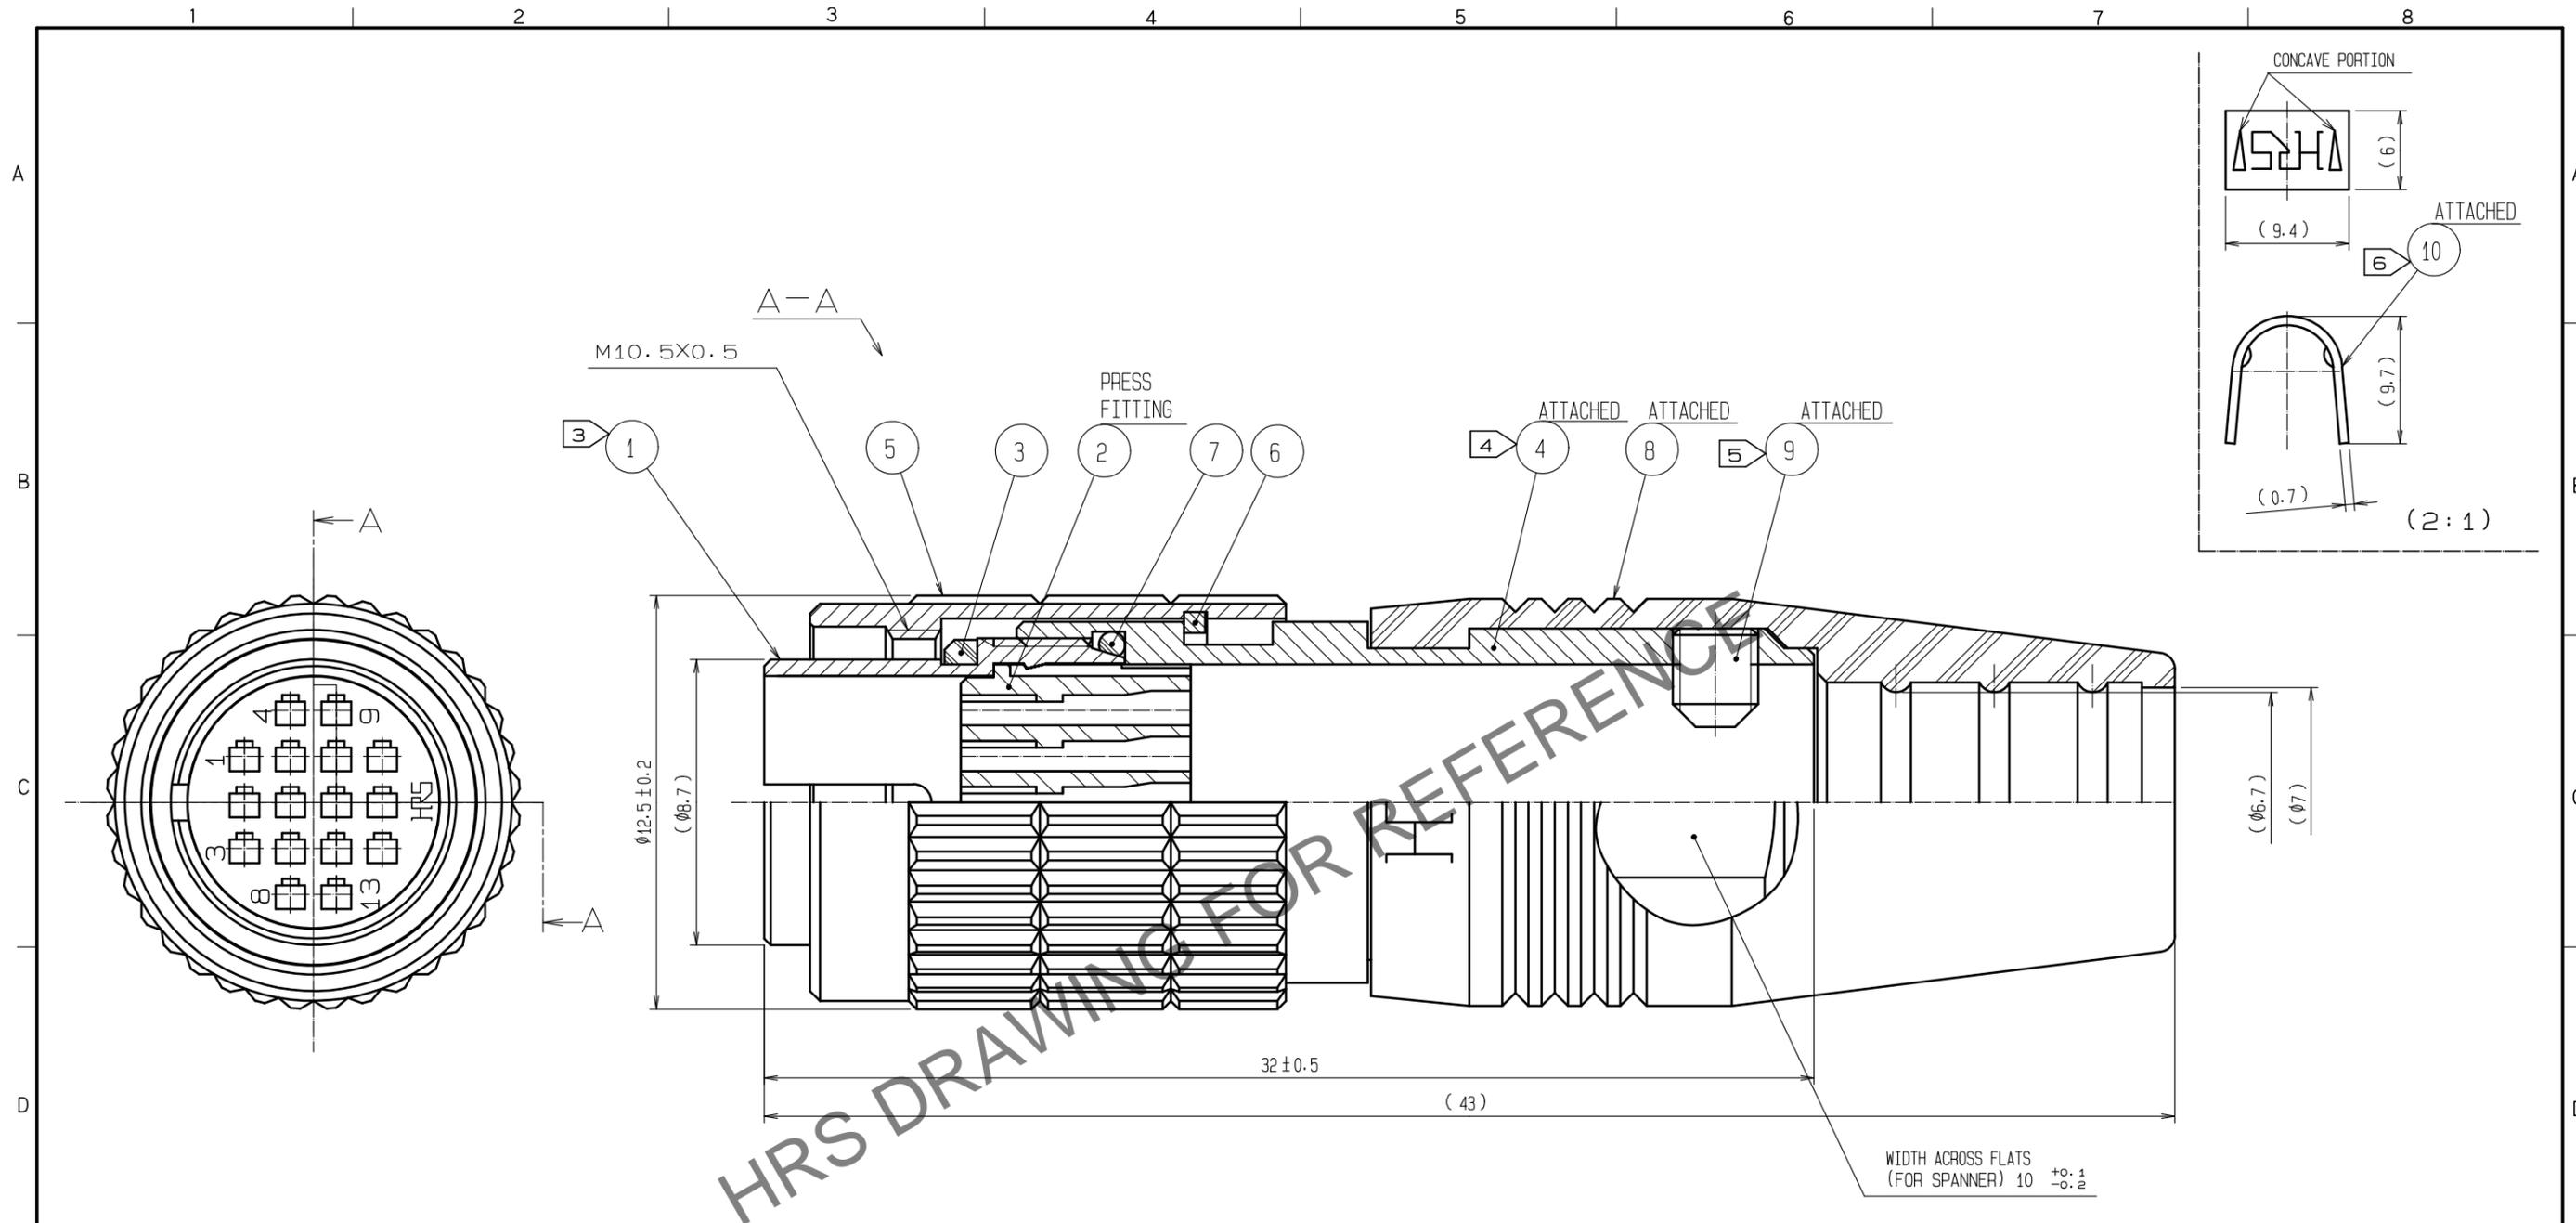

- NOTES
- 1 APPLICABLE CRIMP CONTACT:HR25-PC-211(CL125-0420-0)(APPLICABLE WIRE:AWG#30,WIRE JACKET DIAMETER:Ø0.71 MAX.)
  - 2 APPLICABLE CONTACT REMOVAL TOOL(EXTRACTION TOOL):HR25-TP(CL150-0091-0)
  - ③ THREAD PORTION OF REF. No. ① IS APPLIED WITH PRECOATING TO PREVENT LOOSENESS.  
HOWEVER, THE ADHESIVE EFFECTIVENESS IS DECREASED WHEN REUSED.
  - ⚠ THEREFORE, THREAD PORTION APPLIES TO COAT WITH LOCTITE 263 MANUFACTURED BY HENKEL JAPAN OR EQUIVALENT.
  - ④ THE RECOMMENDED TIGHTENING TORQUE OF REF. No. ④ TO BE 1 N·m.
  - ⑤ THE TIP OF REF. No. ⑨ SHALL BE FIXED TO THE CONCAVE PORTION WITH REF. No. ⑩ CLAMPED TO THE CABLE.  
OPPOSITE SIDE DIMENSION OF A HEXAGON SOCKET OF REF. No. ⑨ IS 1.27mm.  
AND THE RECOMMENDED TIGHTENING TORQUE OF REF. No. ⑨ TO BE 0.3 TO 0.4 N·m.
  - ⑥ MANUAL CRIMPING TOOL OF REF. No. ⑩ : HR10A-TC-02(CL150-0041-2)(THE HOLE DIAMETER FOR CRIMPING:Ø7)
  - 7 ROTATION EXAMPLES OF REF. No. ① AND ④ ARE SHOWN.
  - 8 THE CABLE PULL AND TWISTING STRENGTH AND OTHER CHARACTERISTICS MAY DIFFER,DEPENDING ON THE CABLE STRUCTURE.  
PLEASE CONFIRM BEFORE THE USE.
  - ⚠ 9 THE ASSEMBLY THIS PRODUCT APPLIES TO THE MANUAL ETAD-C0474-00.

NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
5	BRASS	NICKEL PLATING	10	BRASS	
4	BRASS	NICKEL PLATING	9	STEEL	NICKEL PLATING M2.6X0.45X3
3	ETHYLENE PROPYLENE RUBBER	(BLACK)	8	ETHYLENE PROPYLENE RUBBER	(BLACK)
2	POLYPHENYLENE SULFIDE	(BLACK) UL94V-0	7	ETHYLENE PROPYLENE RUBBER	(BLACK)
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	6	PHOSPHOR BRONZE	NICKLE PLATING

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	5 : 1	2	DIS-C-00016973	HT. ZENBA	HY. KOBAYASHI	20240508

APPROVED	:EJ. KUNII	20070621	DRAWING NO.	EDC3-110004-72
CHECKED	:YH. YAMADA	20070619	PART NO.	HR25-9TP-16PC(72)
DESIGNED	:HS. KAWASHIMA	20070618	CODE NO.	CL0125-0403-1-72
DRAWN	:MK. SATO	20070606		