


Dec.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

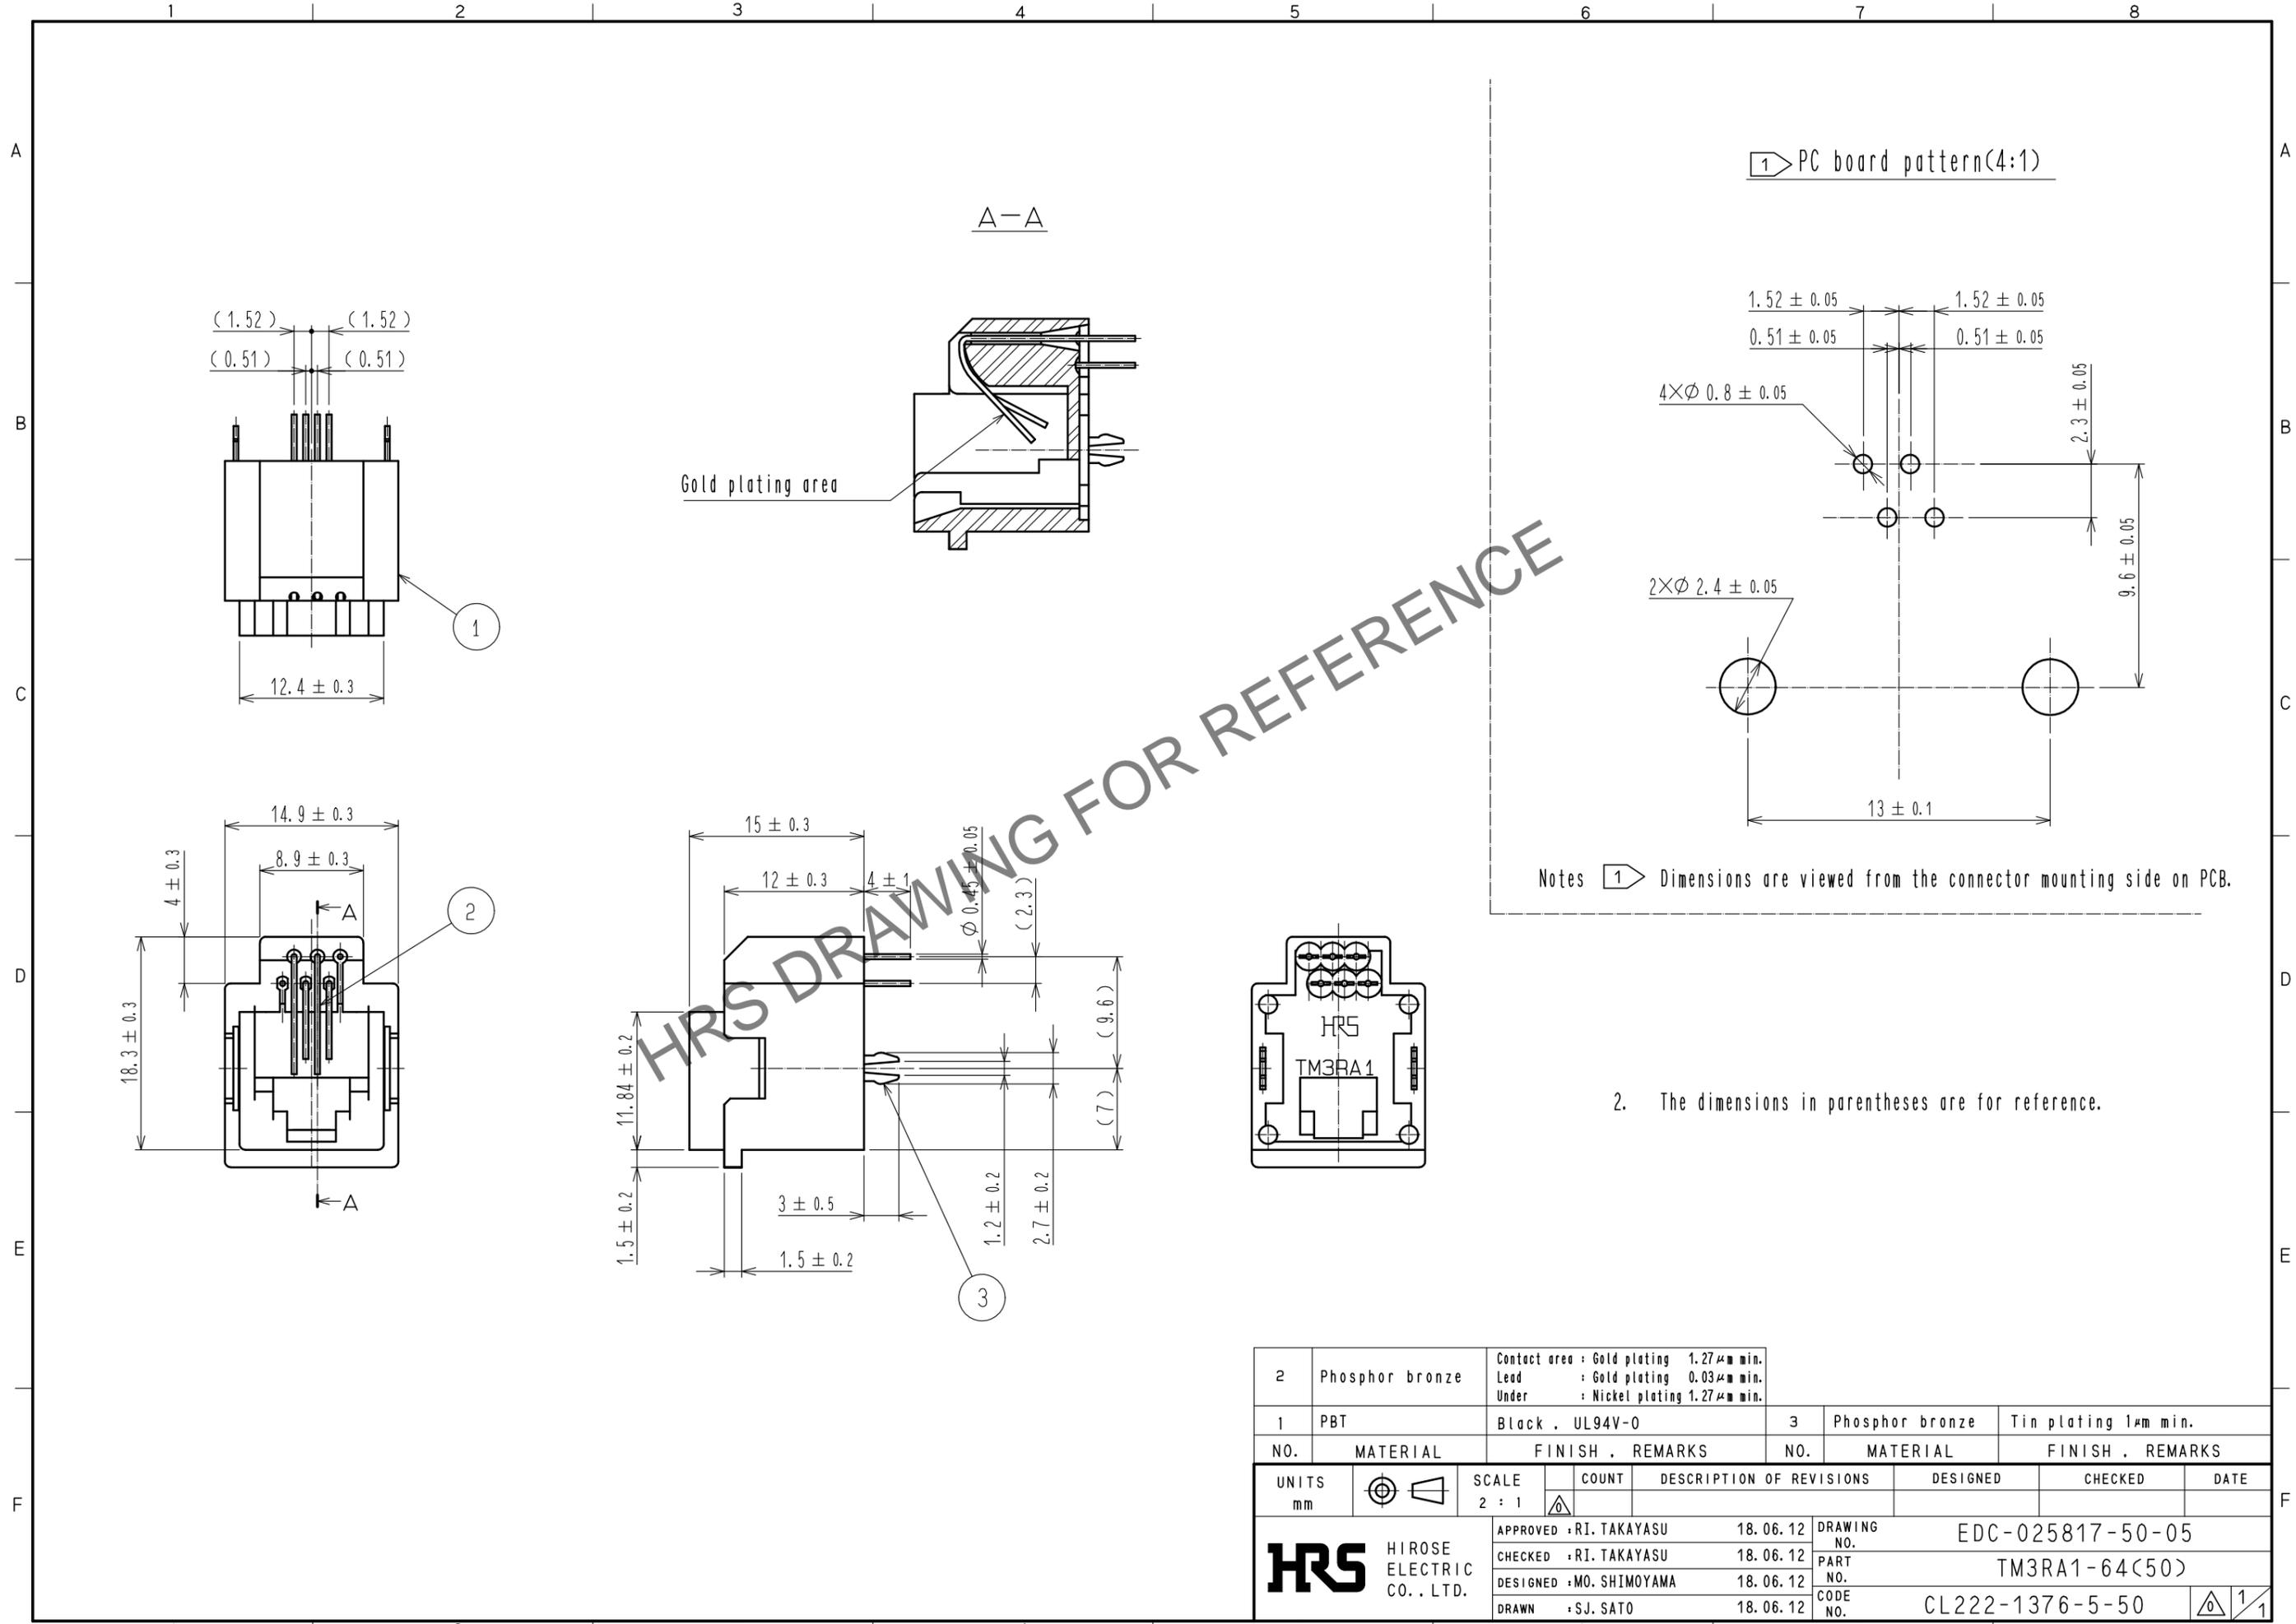

Notes 1 Dimensions are viewed from the connector mounting side on PCB.

2. The dimensions in parentheses are for reference.

2	Phosphor bronze	Contact area : Gold plating 1.27μm min. Lead : Gold plating 0.03μm min. Under : Nickel plating 1.27μm min.	3	Phosphor bronze	Tin plating 1μm min.			
1	PBT	Black . UL94V-0						
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS			
UNITS		SCALE	COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
mm		2 : 1						
<b>HRS</b> HIROSE ELECTRIC CO., LTD.		APPROVED : RI. TAKAYASU	18.06.12	DRAWING NO.		EDC-025817-50-05		
		CHECKED : RI. TAKAYASU	18.06.12	PART NO.		TM3RA1-64(50)		
		DESIGNED : MO. SHIMOYAMA	18.06.12	CODE NO.		CL222-1376-5-50		
		DRAWN : S.J. SATO	18.06.12					